


QUICKSERT®

Brass | Type 1433 | flange

Advantages:

- For brittle and ductile plastics such as unsaturated polyester resins (SMC, ZMC), polyurethane and glass-fibre reinforced thermoplastics
- Universal use
- High-strength and torsion-proof threads
- Optimum assembly characteristics

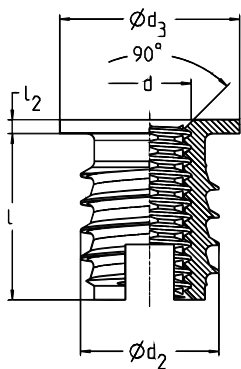

Diameter (d)	Article number	d ₃ nominal size	Length (l) nominal size	a min.	l ₂	Outer diameter (d2)	L min.
M 4	14335040009	10	8	3	1.0	7	9
M 5	14335050112	11	10	4	1.2	8	11
M 6	14335060154	13	14	4	1.4	10	15
M 8	14335080164	15	15	5	1.4	12	16

All technical data refer to the measure mm

